

A Radar Profile of a Multi-year Pressure Ridge Fragment

A multi-year pressure ridge is one of the most formidable ice formations found in the Arctic pack. It is made up of a solid, resistant mass of low-salinity ice which is an obstacle to ships and a potential danger to proposed offshore bottom-founded structures, cables and pipelines. Multi-year ridges can be driven by the wind or pushed by the pack into shallow waters where they may come aground, deeply gouge the seabed and thereby destroy a seabed installation. Because of this potential danger, and to meet the need for information on the distribution of ice thickness, which is used in studies related to modelling and understanding of the dynamics of the sea-ice cover, a number of investigations have been made to profile the thickness of multi-year ice formations. These studies have included ice thickness profiles obtained with side-looking sonar^{1,2,3,4} and direct measurements^{1,3,5} made through drill holes or fresh cracks which have split the ice in two⁵. In addition, the thickness of a multi-year floe has also been profiled with impulse radar⁶.

In May 1977, impulse radar was used to profile the thickness of an ice island⁷ and the first-year sea-ice near our camp site on Narwhal Island, Alaska. At this location, a small fragment of a multi-year pressure ridge was found with good access to the ridge crest (Fig. 1). The impulse radar system was taken to the ridge so that it could be used to ascertain if thick multi-year ice could be measured and if the thickness of the ridge along the crest could be profiled. A cross-sectional profile of the ridge was not attempted, because the ice surface was buried under a thick layer of drift snow.

The impulse radar profiling system consisted of an electronics console, a graphic recorder and an antenna. The system and its operational characteristics have been described in several publications^{6,7,8,9}. The radar antenna was pulled for a distance of 21 metres along the top of the ridge. The graphic record obtained is shown in Fig. 2. The signal

information shown is the travel time of the radar impulse signal to and from the various reflecting surfaces. These include the surface of the ridge, internal block structure, and the irregular surface of the keel. The reflection from the ridge keel is indicated by the solid line drawn through the data.

Taking the two-way travel time scaled from the graphic record, and using an effective propagation velocity of the radar in multi-year ice⁵ of 0.152 m/ns, the ice thickness was determined from:

$$D = V_e \frac{t_d}{2}, \text{ where:}$$

D = depth
 V_e = effective velocity of the radar signal
 t_d = travel time from transceiver antenna to and from subsurface interface

The calculated ice thicknesses for the stations shown in Fig. 2 are shown in Table 1 along with the height of the ridge sail determined by elevation survey. The thickest ice was 14.0 m. Also listed in Table 1 is the keel depth, determined by subtracting the sail elevation, rounded off to the nearest tenth, from the ice thickness, and the sail height to depth ratio for each station.

The average height to depth ratio is 1:3.28. Surprisingly, this ratio is in reasonably good agreement with the 1:3.13 ratio determined by direct drilling or sonar measurement⁴. Because of its beam spread, the radar antenna can "see" other surfaces besides the one directly below it. It was therefore expected that the graphic record would show returns from surfaces somewhat further away than the bottom of the ridge. If this had occurred to any significant extent, the apparent bottom or ice thickness would have been greater and the average height to depth ratio would have been disproportionately higher.

Using the data listed in Table 1, a cross-section of the ridge was constructed (Fig. 3). Also plotted in Fig. 3 is the keel depth as determined by using the height to depth ratio of 1:3.13. Because this ratio is less than the average one arrived at in this study, the calculated depth shown in Fig. 3 is less. The difference between the two bottom profiles



FIG. 1. West end view of the multi-year pressure ridge fragment.

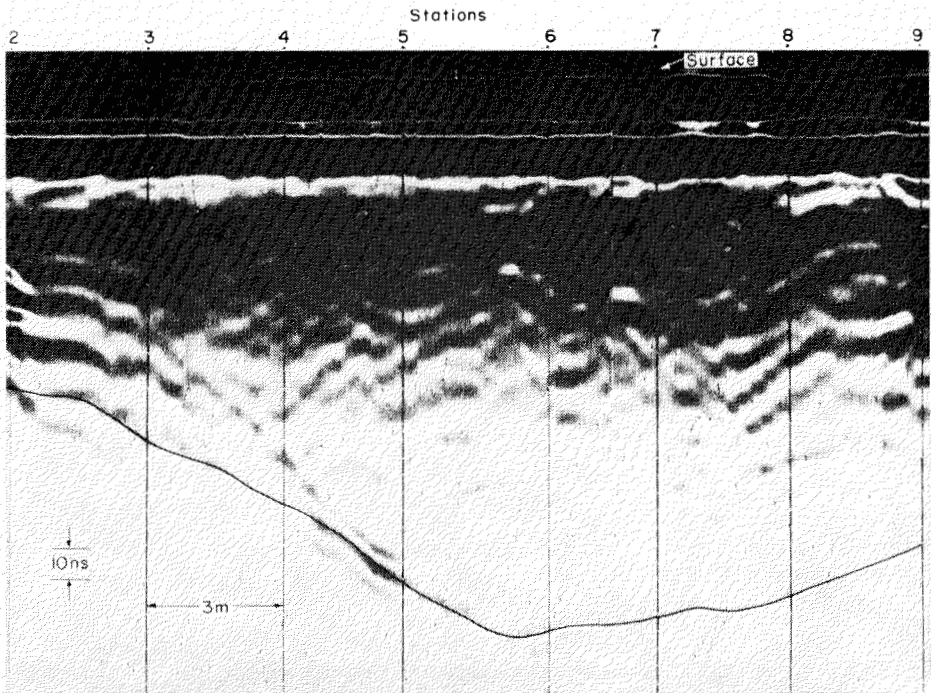


FIG. 2. Impulse radar data taken along crest of the multi-year pressure ridge fragment.

may represent the effect of antenna beam spread as mentioned above. This remains to be verified.

Another technique⁵ may be used to construct a cross section of multi-year ice with a thickness greater than 5.5 m. The ice thickness is first multiplied by 0.2425 to obtain the surface elevation. Subtracting this height from the total thickness gives the keel depth. The result of applying this analysis gives the top and bottom profiles shown as no. 3 in

Fig 3. The resulting cross-section agrees quite well with the cross-section constructed from the data in Table 1.

This report demonstrates the potential usefulness of impulse radar for determining the thickness of multi-year pressure ridges. Although reasonably good correlation was shown between the profile as arrived at in this study and that of others⁴, it must be cautioned that radar profiling of multi-year ice is still in its infancy. Further field work

TABLE 1. Elevation, thickness, depth and height-to-depth measurements for the multi-year pressure ridge fragment.

Station	Sail elevation	Ice thickness	Keel depth	Height: depth ratio
1	1.89 m	8.3 m	6.4 m	1:3.37
2	2.29	9.8	7.5	1:3.26
3	2.71	11.0	8.3	1:3.07
4	3.02	13.4	10.4	1:3.47
5	3.29	14.0	10.7	1:3.24
6	3.08	13.9	10.8	1:3.48
7	2.78	13.3	10.5	1:3.75
8	2.89	10.5	7.6	1:2.62
				(Mean) 1:3.28

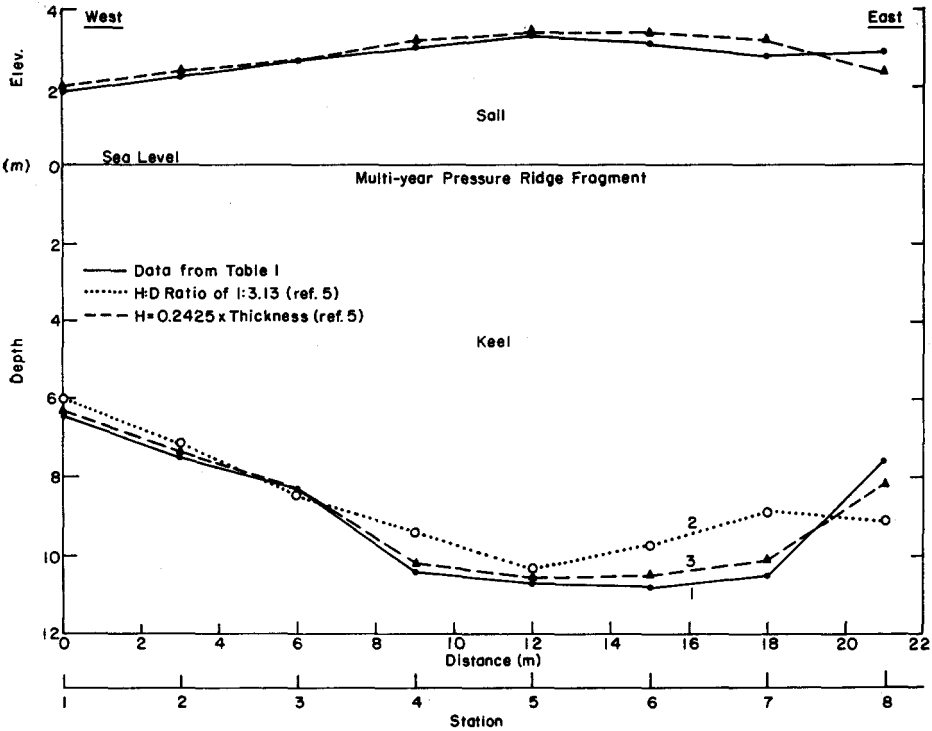


FIG. 3. Cross-section of the multi-year pressure ridge fragment, as determined: 1, from impulse-radar results of the present study; 2 and 3, from results of Kovacs 1977 (reference no. 4).

must be carried out to cross-correlate measurements of ice thickness obtained from radar with those obtained from a drill hole. This study is therefore only a first step. Nevertheless, with guarded optimism, it is considered that such tests will demonstrate that radar can provide useful information on the thickness of multi-year pressure ridges. However, unlike multi-year ridges which are composed of solid ice, first-year pressure ridges generally consist of a random accumulation of ice blocks. Below sea level, the voids between these blocks are filled with salt water into which the radar impulse cannot penetrate because of the water's high conductivity. Therefore, there is no expectation that impulse radar will be usable for profiling the thickness of first-year pressure ridges.

ACKNOWLEDGEMENTS

This work was supported by the U.S. Office of Naval Research, under MIPR No. N0001477MP70016 and the National Oceanic and Atmospheric Administration Bureau of Land Management, Outer Continental

Shelf Environment Assessment Program, under NOAA Purchase Order No. 01-5-022-1651. The field assistance of Mr. John Kelly and the review of this paper by Dr. Wilford F. Weeks are gratefully acknowledged.

Austin Kovacs

U.S. Army Cold Regions Research and Engineering Laboratory
Hanover, New Hampshire 03755,
U.S.A.

REFERENCES

- ¹Kovacs, A., Weeks, W.F., Ackley, S. and Hibler, W.D., III. 1973. Structure of a multi-year pressure ridge. *Arctic*, 26(1): 22-31.
- ²Kovacs, A. and Gow, A.J. 1976. Some characteristics of grounded floebergs near Prudhoe Bay, Alaska. *U.S. Army Cold Regions Research and Engineering Laboratory, Report 76-34*.
- ³Kovacs, A. and Mellor, M. 1971. *Sea Ice Pressure Ridges and Ice Islands*. Hanover, New Hampshire: Creare Incorporated (Technical Note 122).

- ⁴Kovacs, A. 1976. Grounded ice in the fast zone along the Beaufort Sea coast of Alaska. *U.S. Army Cold Regions Research and Engineering Laboratory, Report 76-32*.
- ⁵Ackley, S.F., Hibler, W.D., III, Kugzruk, K.K., Kovacs, A. and Weeks, W.F. 1976. Thickness and roughness variations of Arctic multi-year sea ice. *U.S. Army Cold Regions Research and Engineering Laboratory, Report 76-18*.
- ⁶Kovacs, A. 1977. Sea ice thickness profiling and under ice oil entrapment. *U.S. Army Cold Regions and Engineering Laboratory (OTC 2949)*.
- ⁷Kovacs, A. 1977. Iceberg thickness profiling. *Fourth International Conference on Port and Ocean Engineering under Arctic Conditions*. St. John's, Newfoundland: Memorial University of Newfoundland.
- ⁸Campbell, K.J. and Orange, A.S. 1974. A continuous profile of sea ice and freshwater ice thickness by impulse radar. *Polar Record*, 17(106):31-41.
- ⁹Morey, R.M. 1974. Continuous subsurface profiling by impulse radar. *Proceedings of Engineering Foundation Conference on Subsurface Exploration for Underground Excavation and Heavy Construction*. New York: American Society of Civil Engineers.